

#3
US-1-2

Patent
Attorney's Docket No. 027557-072

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE - 3 2002

TC 2000 MAIL ROOM

In re Patent Application of)
Johan MERCKE et al.)
Application No.: 09/982,801)
Filed: October 22, 2001)
For: MONITORING CIRCUIT)
Group Art Unit: 2819
Examiner: Unassigned

CLAIM FOR CONVENTION PRIORITY

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

The benefit of the filing date of the following prior foreign application in the following foreign country is hereby requested, and the right of priority provided in 35 U.S.C. § 119 is hereby claimed:


United Kingdom Patent Application No. 0025921.8

Filed: October 23, 2000

In support of this claim, enclosed is a certified copy of said prior foreign application. Said prior foreign application was referred to in the oath or declaration. Acknowledgment of receipt of the certified copy is requested.

Respectfully submitted,

BURNS, DOANE, SWECKER & MATHIS, L.L.P.

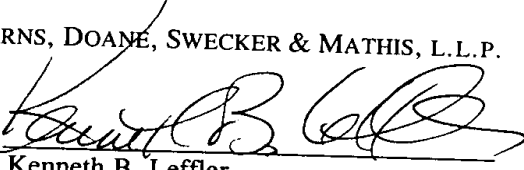
By: 
Kenneth B. Leffler
Registration No. 36,075

Date: February 6, 2002

P.O. Box 1404
Alexandria, Virginia 22313-1404
(703) 836-6620

THIS PAGE BLANK (USPTO)

THIS PAGE BLANK (USPTO)



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Andrew Gersey

Dated

4 October 2001

THIS PAGE BLANK (USPTO)

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference

HL 76572/000/DCO

23 OCT 2000

2. Patent application number
(The Patent Office will fill in this part)

0025921.8

3. Full name, address and postcode of the or of each applicant (*underline all surnames*)

TELEFONAKTIEBOLAGET L M ERICSSON (publ)
SE-126 25 Stockholm
Sweden

Patents ADP number (*if you know it*)

If the applicant is a corporate body, give the country/state of its incorporation

Sweden

7550399001

4. Title of the invention
MONITORING CIRCUIT

5. Full name of your agent (*if you have one*)

Haseltine Lake & Co.

"Address for service" in the United Kingdom to which all correspondence should be sent (*including the postcode*)

Imperial House
15-19 Kingsway
London WC2B 6UD

Patents ADP number (*if you know it*)

34001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (*if you know it*) the or each application number

Country

Priority application number
(*if you know it*)

Date of filing
(*day/month/year*)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(*day/month/year*)

8. Is a statement of inventorship and of right to a grant of patent required in support of this request? (*Answer "Yes" if:*

YES

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form

Description 9

Claim(s) 7

Abstract 1

Drawing(s) 2.72

10. If you are also filing any of the following, state how many against each item.

Priority documents -

Translations of priority documents -

Statement of inventorship and right to a grant of patent (Patents Form 7/77) -

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77) -

Any other documents (please specify) -

11. I/We request the grant of a patent on the basis of this application

Signature

H. S. O'Connell

Date

20 October 2000

12. Name and daytime telephone number of person to contact in the United Kingdom

Mr. D. C. O'Connell

[0117] 9103200

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered "Yes" Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

MONITORING CIRCUIT

TECHNICAL FIELD OF THE INVENTION

5 This invention relates to a monitoring circuit, and in particular to a circuit for monitoring a battery voltage, for example in a mobile communications device such as a mobile phone.

BACKGROUND OF THE INVENTION

10 In operation of a battery-powered mobile communications device, such as a mobile phone, it is useful for a controller of the device to have information about various system parameters, such as the voltage being supplied by the battery. However, if frequent measurements are made by the controller, this
15 requires a large number of measurements to be sent over the internal communication bus of the device, which puts an increased load on the controller, and results in higher power consumption.

20 US-5,570,025 describes a cellular phone in which, during a call, battery voltage measurements are sent to a CPU for processing.

JP-11-183532 discloses a battery monitoring apparatus with an analog-digital (A/D) converter, which converts a measured battery voltage into a digital
25 signal, and monitors the signal in cycles. The device further includes means for setting a reference voltage, and for comparing the digitized battery voltage with the reference voltage, providing an output interruption signal to the processor when the voltage drops below
30 the reference voltage. Thus, battery monitoring is carried out independently of the processor, until the voltage falls below the preset reference voltage.

Although this system provides a warning when a battery voltage falls below a preset threshold, it does
35 not provide any further information about the condition

of the battery.

SUMMARY OF THE INVENTION

5 In accordance with one aspect of the invention, a monitoring device includes output registers, from which parameter values can be read by a processor unit.

Advantageously, the device makes frequent measurements, and updates parameter values on the basis of those measurements. The updated stored parameter
10 values can then be read by the processor.

This has the advantage that the processor does not have to read a large number of values, in order to obtain the information required about the parameters. This therefore has the result that communications on
15 the bus are reduced, and power consumption is reduced.

For example, the parameters may include a maximum battery voltage, a minimum battery voltage, and an average battery voltage.

Moreover, the monitoring device can be used as a
20 battery monitor in a mobile communications device, such as a mobile phone. In that case, a battery voltage would be expected to change, depending on whether or not the device is transmitting. Separate output registers can therefore be provided for parameters
25 which depend on whether or not the device is transmitting. For example, measured parameters may include a minimum battery voltage while transmitting, a minimum battery voltage while not transmitting, a maximum battery voltage while transmitting, a maximum
30 battery voltage while not transmitting, an average battery voltage while transmitting, and an average battery voltage while not transmitting.

In addition, the monitoring device in accordance with the invention can be used to monitor a battery
35 voltage during battery charging, the maximum battery

voltage being of most importance. In that case, a charging current can also be measured, and output registers can be provided for parameters such as a maximum current, minimum current, and average current.

5 The monitoring device of the present invention can further allow threshold values to be set for any of the measured parameter values, and can automatically send a signal to the processor unit whenever any parameter values passes its respective threshold value.

10 It should be emphasised that the term "comprises/comprising" when used in this specification is taken to specify the presence of stated features, integers, steps or components but does not preclude the presence or addition of one or more other features,
15 integers, steps, components or groups thereof.

BRIEF DESCRIPTION OF DRAWINGS

Figure 1 is a block schematic diagram of a mobile communications device incorporating a monitoring device
20 in accordance with the invention.

Figure 2 is a flow chart showing operation of the device in accordance with the invention.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENT

25 Figure 1 is a block schematic diagram of a mobile communications device. The invention is generally applicable to portable radio communication equipment or mobile radio terminals, such as mobile telephones, pagers, communicators, electronic organisers,
30 smartphones, personal digital assistants (PDAs), portable music devices, or the like.

Specifically, Figure 1 shows a mobile phone 10 which, as is conventional, has an antenna 20, connected to transceiver circuits 30, which operate under the
35 control of a CPU 40. The mobile phone 10 is powered by

a battery 50. The battery 50 is shown in Figure 1 as being separate from the phone 10. However, it will be apparent that the invention is equally applicable to monitoring the condition of a battery which is built into, or contained within, a portable electronic device.

In accordance with the invention, the mobile phone 10 includes a monitoring device 60, which is connected to the battery 50 to monitor the voltage supplied thereby and, when the battery 50 is being charged, to monitor the charging current being supplied thereto.

The monitoring device 60 includes an A/D converter 70, which receives analog signals relating to the battery voltage and charging current, and converts them into digital form. A logic unit 72 is connected to the A/D converter 70, to receive therefrom the digital signals. The logic unit 72 is also connected to the transceiver circuitry 30 in this illustrated embodiment of the invention.

The logic unit is also connected to supply data to a series of output registers 73-79, as is described in more detail below.

The CPU 40 can access the values stored in the registers 73-79 at any time, retrieving the stored data values on a data bus 80. The logic unit 72 also has a connection to the data bus 80.

Further, the CPU 40, transceiver circuits 30 and logic unit 72 are connected via the internal communications bus 85 of the mobile phone 10, to transmit and receive digital signalling.

Figure 2 is a flow chart describing the operation of the logic unit 72, and in particular describing the measurements which are made, namely the inputs which are taken from the A/D converter 70, and the way in which the registers 73-79 are updated.

The logic unit 72 of the monitoring device 60 receives a new slot, step 100. In this illustrated embodiment of the invention, the $100\mu s$ long slots are grouped into sets of 10 slots, allowing some
5 measurements to be made only once in each set of 10 slots, while allowing other measurements at particular modes of operation of the device to be taken more often.

Thus, in step 102, it is determined whether the
10 new slot is the first slot in a set of 10. If so, it is next determined in step 104 whether the phone is in a sleep mode, that is, a mode in which it is switched on, but neither transmitting nor receiving.

If the phone is in a sleep mode, the process
15 passes to step 105, in which it is determined whether or not to make a measurement during that slot. This determination is made on the basis of an adjustable user setting. If the setting is that no measurement is to be made when in the sleep mode, the process returns
20 to the start.

However, if it is determined in step 105 that a measurement should be made, or if it is determined in step 104 that the phone is not in the sleep mode, the procedure passes to step 106, in which the voltage VBAT
25 supplied by the battery is measured.

In step 108, this measured battery voltage can be used to update stored values in one or more of the registers 73-79. Thus, in this case, there is a first register 73 which stores the highest recorded value of
30 the battery voltage $VBAT_{max}$. If the voltage measured in 106 exceeds the value stored in the register 73, it is used to update that stored value.

A second register 74 stores the average voltage
which has been supplied by the battery over the
35 preceding second. With one measurement being made

every 1000 μ s, 1024 successive measurements are added together and divided by 1024, and the resulting average value is stored in the VBAT_{ave} register 74.

As well as the maximum voltage supplied by the battery, another parameter which is of importance is the minimum voltage supplied by the battery. However, since the battery voltage will vary, depending on whether or not the device is transmitting at the time, it is advantageous to store two separate minimum values, namely a first minimum value which was recorded while the device was not transmitting, and a second probably lower minimum value which was recorded during a period while the device was transmitting.

In this illustrated preferred embodiment, the logic unit 72 is connected to the transceiver circuitry 30 to receive therefrom a signal which indicates whether the transmitter is active. This signal is provided by devices which operate in some mobile communications systems, such as GSM. However, it is not provided in all systems. For example, this signal is not present in devices which operate in a Wideband Code Division Multiple Access (W-CDMA) system. Thus, in the case of a device which operates only in accordance with a system such as W-CDMA where this signal is not provided, the device of the present invention is unable to provide separate values for the two cases mentioned above. However, a device which operates in a W-CDMA system uses a current which tends to have lower peak values than a device operating in a GSM system. Therefore, the absence of a signal which indicates whether the transmitter is active is relatively unimportant, because it is less important in this case to measure the voltage at a higher rate during transmissions.

For a dual mode device, for example operating in

the GSM system and in a system such as W-CDMA which does not provide a signal indicating whether the transmitter is active, two separate output values can be provided. However, an output value stored at a time
5 when the transmitter active signal is not present may for example represent a voltage supplied at a time when the transmitter is active in the W-CDMA mode, in which no such signal is provided.

In step 110, it is determined whether the
10 transmitter active signal TXON is detected. If the transmitter active signal TXON is detected, the process passes to step 112, and the third register 75, storing the minimum battery voltage supplied while the transmitter active signal is supplied, $VBAT_{min} @ TXON$,
15 is updated. If, on the other hand, the transmitter active signal TXON is not supplied, the process passes to step 114, and the fourth register 76, storing the minimum battery voltage supplied at a time when the transmitter active signal is not provided, $VBAT_{min} @ no$
20 TXON, is updated, if the currently measured battery voltage falls below that value.

If, at step 102, it is determined that the slot is not the first slot in a set of 10, the process passes to step 116, where it is then determined whether the
25 slot is the last slot in a set of 10. If it is not, the process passes to step 118. As before, it is determined whether the transmitter active signal TXON is being supplied. If it is not, the process passes to step 119, in which it is determined whether or not to
30 make a measurement during that slot. This determination is made on the basis of an adjustable user setting. If the setting is that no measurement is to be made when there is no TXON signal, the process
returns to the start and awaits a new slot.

35 However, if it is determined in step 119 that a

measurement should be made, or if it is determined in step 118 that the transmitter is active, the process passes to step 120, in which the battery voltage is measured.

5 As previously described, this measured voltage VBAT is compared with the value currently stored in the first register 73 and, if it exceeds that stored value, the value stored in the register is updated, step 122. Similarly, the value is compared with the value stored
10 in the third register 75 and, if it is lower than the stored value, it is used to update the stored value at step 112.

 If it is determined at step 116 that the current slot is the last slot of 10, the procedure passes to
15 step 124, where it is determined whether the battery is being charged. If it is not, no measurement is taken and the procedure awaits a new slot. If the battery is being charged, however, the charge current is measured at step 126, and the measured value is used, as
20 appropriate, to update the values stored in the fifth, sixth and seventh registers 77, 78, 79, which store the maximum charging current I_{max} , the minimum charging current I_{min} , and the average charging current I_{ave} , at step 128.

25 These values stored in the register can then be accessed by the CPU 40 as required, for example, only once every second.

 This has the advantage, as stated earlier, that the CPU 40 does not have to read a large number of
30 values, in order to obtain the information required about the parameters.

 When a stored maximum or minimum value is read from a register by the CPU, the value stored in that
35 register is reset. Thus, the stored value in the register is the maximum or minimum value of the

parameter (as the case may be) since the CPU last read a stored value.

5 In the same way as the parameters mentioned above, it is possible to measure other parameters, such as the temperature of the battery, or of any other component to which the monitoring device may be connected, and to store maximum, minimum, and average values of the temperature or other parameter in registers in the monitoring device. Again, these parameter values can
10 be accessed by the CPU 40 at any rate considered appropriate. Since the temperature is a relatively slowly varying value, it may not be necessary to monitor the values of the parameters relating to temperature often.

15 As described in United Kingdom Patent Application No. 0014840.3, the monitoring device 60 can further include a function which allows a threshold value to be set for any or all of the parameters which are measured by the device. When any parameter reaches its
20 corresponding threshold value, an interrupt signal is sent to the CPU 40. This means that the CPU may need to monitor the parameter values less often, because it will still be informed promptly whenever a threshold value is reached. This can therefore reduce still
25 further the requirement for communications on the bus.

There is therefore provided a monitoring device which has the result that communications on the bus are reduced, and power consumption is reduced. Moreover,
the device is capable of operating in systems with no
30 internal transmit signal, such as W-CDMA.

CLAIMS

1. A monitoring device, for allowing a processor to monitor a value of a parameter derived from an analog signal, the monitoring device comprising:

5 an analog-digital converter, for producing a digital signal corresponding to the analog signal;

a logic unit, for obtaining a value of said parameter, based on the digital signal; and

10 an output register, accessible by the processor unit, the register containing the value of said parameter obtained by said logic unit.

2. A monitoring device as claimed in claim 1, wherein the monitoring device further comprises means for setting a threshold value for said parameter, and
15 for sending a signal to said processor when the value of the parameter reaches the threshold value.

3. A monitoring device, for connection to a battery to allow a processor to monitor a voltage supplied by the battery, the monitoring device
20 comprising:

an analog-digital converter, for producing a digital signal stream, corresponding to successive measured values of the battery voltage;

25 an output register, accessible by the processor unit, the register containing the value of at least one output parameter derived from said signal stream; and

a logic unit, for updating the value of the or each parameter stored in the register as required in response to the digital signal stream.

30 4. A monitoring device as claimed in claim 3, wherein the register contains the maximum value of the battery voltage supplied over a period since the register was last accessed by the processor.

5. A monitoring device as claimed in claim 3 or
35 4, wherein the register contains the minimum value of

the battery voltage supplied over a period since the register was last accessed by the processor.

5 6. A monitoring device as claimed in claim 3, 4 or 5, wherein the register contains the average value of the battery voltage supplied over a fixed period.

7. A monitoring device, for connection to a battery to allow a processor to monitor a charging current supplied to the battery, the monitoring device comprising:

10 an analog-digital converter, for producing a digital signal stream, corresponding to successive measured values of the charging current;

 an output register, accessible by the processor unit, the register containing the value of at least one output parameter derived from said signal stream; and

15 a logic unit, for updating the value of the or each parameter stored in the register as required in response to the digital signal stream.

20 8. A monitoring device as claimed in claim 7, wherein the register contains the maximum value of the charging current supplied over a period since the register was last accessed by the processor.

25 9. A monitoring device as claimed in claim 7 or 8, wherein the register contains the minimum value of the charging current supplied over a period since the register was last accessed by the processor.

30 10. A monitoring device as claimed in claim 7, 8 or 9, wherein the register contains the average value of the charging current supplied over a period.

 11. A mobile communications device, comprising a monitoring device as claimed in any of claims 7 to 10.

35 12. A mobile communications device, comprising a processor, and a monitoring device, for connection to a battery of said device to allow the processor to monitor a voltage supplied by the battery, the

monitoring device comprising:

an analog-digital converter, for producing a digital signal stream, corresponding to successive measured values of the battery voltage;

5 an output register, accessible by the processor unit, the register containing the value of at least one output parameter derived from said signal stream; and

10 a logic unit, for updating the value of the or each parameter stored in the register as required in response to the digital signal stream.

13. A mobile communications device as claimed in claim 12, wherein the register contains the maximum value of the battery voltage supplied over a period and the average value of the battery voltage supplied over
15 a period.

14. A mobile communications device as claimed in claim 13, wherein the maximum value of the battery voltage supplied over a period is updated at a first rate, and the average value of the battery voltage
20 supplied over a period is updated at a second rate slower than the first rate.

15. A mobile communications device as claimed in claim 13 or 14, which, in at least one mode of operation, produces an internal signal indicating that
25 the device is transmitting, and wherein the stored maximum value of the battery voltage is updated at a first rate while said internal signal is being produced, and at a second lower rate while said internal signal is not being produced.

30 16. A mobile communications device as claimed in claim 12, wherein the register contains the minimum value of the battery voltage supplied over a period and the average value of the battery voltage supplied over a period.

35 17. A mobile communications device as claimed in

claim 16, wherein the minimum value of the battery voltage supplied over a period is updated at a first rate, and the average value of the battery voltage supplied over a period is updated at a second rate
5 slower than the first rate.

18. A mobile communications device as claimed in claim 16 or 17, which, in at least one mode of operation, produces an internal signal indicating that the device is transmitting, and wherein the stored
10 minimum value of the battery voltage is updated at a first rate while said internal signal is being produced, and at a second lower rate while said internal signal is not being produced.

19. A mobile communications device as claimed in any one of claims 12 to 18, which, in at least one mode of operation, produces an internal signal indicating that the device is transmitting, and wherein the register contains a first minimum value of the battery voltage supplied over a period while said internal
15 signal is being produced, and a second minimum value of the battery voltage supplied over a period while said
20 internal signal is not being produced.

20. A monitoring device, for connection to a battery to allow a processor to monitor a temperature,
25 the monitoring device comprising:

an analog-digital converter, for producing a digital signal stream, corresponding to successive measured values of the temperature;

an output register, accessible by the processor unit, the register containing the value of at least one
30 output parameter derived from said signal stream; and

a logic unit, for updating the value of the or each parameter stored in the register as required in response to the digital signal stream.

35 21. A monitoring device as claimed in claim 20,

wherein the register contains the maximum value of the temperature supplied over a period since the register was last accessed by the processor.

5 22. A monitoring device as claimed in claim 20 or 21, wherein the register contains the minimum value of the temperature supplied over a period since the register was last accessed by the processor.

10 23. A monitoring device as claimed in claim 20, 21 or 22, wherein the register contains the average value of the temperature supplied over a fixed period.

24. A method of monitoring a value of a parameter derived from an analog signal, the method comprising:

15 producing a digital signal corresponding to the analog signal;

obtaining a value of said parameter, based on the digital signal; and

storing the obtained value in an output register, accessible by a processor unit.

20 25. A method as claimed in claim 24, further comprising setting a threshold value for said parameter, and for sending a signal to said processor when the value of the parameter reaches the threshold value.

25 26. A method of monitoring a voltage supplied by a battery, the method comprising:

producing a digital signal stream, corresponding to successive measured values of the battery voltage;

30 storing a value of at least one output parameter derived from said signal stream in an output register, accessible by a processor unit; and

updating the value of the or each parameter stored in the register as required in response to the digital signal stream.

35 27. A method as claimed in claim 26, wherein the

register contains the maximum value of the battery voltage supplied over a period since the register was last accessed by the processor.

28. A method as claimed in claim 26 or 27,
5 wherein the register contains the minimum value of the battery voltage supplied over a period since the register was last accessed by the processor.

29. A method as claimed in claim 26, 27 or 28,
10 wherein the register contains the average value of the battery voltage supplied over a fixed period.

30. A method of monitoring a charging current supplied to a battery, the method comprising:

producing a digital signal stream, corresponding to successive measured values of the charging current;
15 storing the value of at least one output parameter derived from said signal stream in an output register, accessible by the processor unit; and

updating the value of the or each parameter stored in the register as required in response to the digital
20 signal stream.

31. A method as claimed in claim 30, comprising storing in the register the maximum value of the charging current supplied over a period since the register was last accessed by the processor.

25 32. A monitoring device as claimed in claim 30 or 31, comprising storing in the register the minimum value of the charging current supplied over a period since the register was last accessed by the processor.

30 33. A method as claimed in claim 30, 31 or 32, comprising storing in the register the average value of the charging current supplied over a period.

34. A method of monitoring a temperature, the method comprising:

producing a digital signal stream, corresponding
35 to successive measured values of the temperature;

storing the value of at least one output parameter derived from said signal stream in an output register, accessible by a processor unit; and

5 updating the value of the or each parameter stored in the register as required in response to the digital signal stream.

10 35. A monitoring device as claimed in claim 34, comprising storing in the register the maximum value of the temperature supplied over a period since the register was last accessed by the processor.

36. A monitoring device as claimed in claim 34 or 35, comprising storing in the register the minimum value of the temperature supplied over a period since the register was last accessed by the processor.

15 37. A monitoring device as claimed in claim 34, 35 or 36, comprising storing in the register the average value of the temperature supplied over a fixed period.

MONITORING CIRCUIT

ABSTRACT

5 There is provided a monitoring device which can be
used as a battery monitor in a mobile communications
device, such as a mobile phone. The monitoring device
includes output registers, from which parameter values
can be read by a processor unit.

10 Advantageously, the device makes frequent
measurements, and updates parameter values on the basis
of those measurements. The updated stored parameter
values can then be read by the processor. This has the
advantage that the processor does not have to read a
large number of values, in order to obtain the
information required about the parameters. This
15 therefore has the result that communications on the bus
are reduced, and power consumption is reduced.

20 For example, the parameters may include a maximum
battery voltage, a minimum battery voltage, and an
average battery voltage, as well as parameters relating
to the current supplied to the battery during charging.

THIS PAGE BLANK (USPTO)

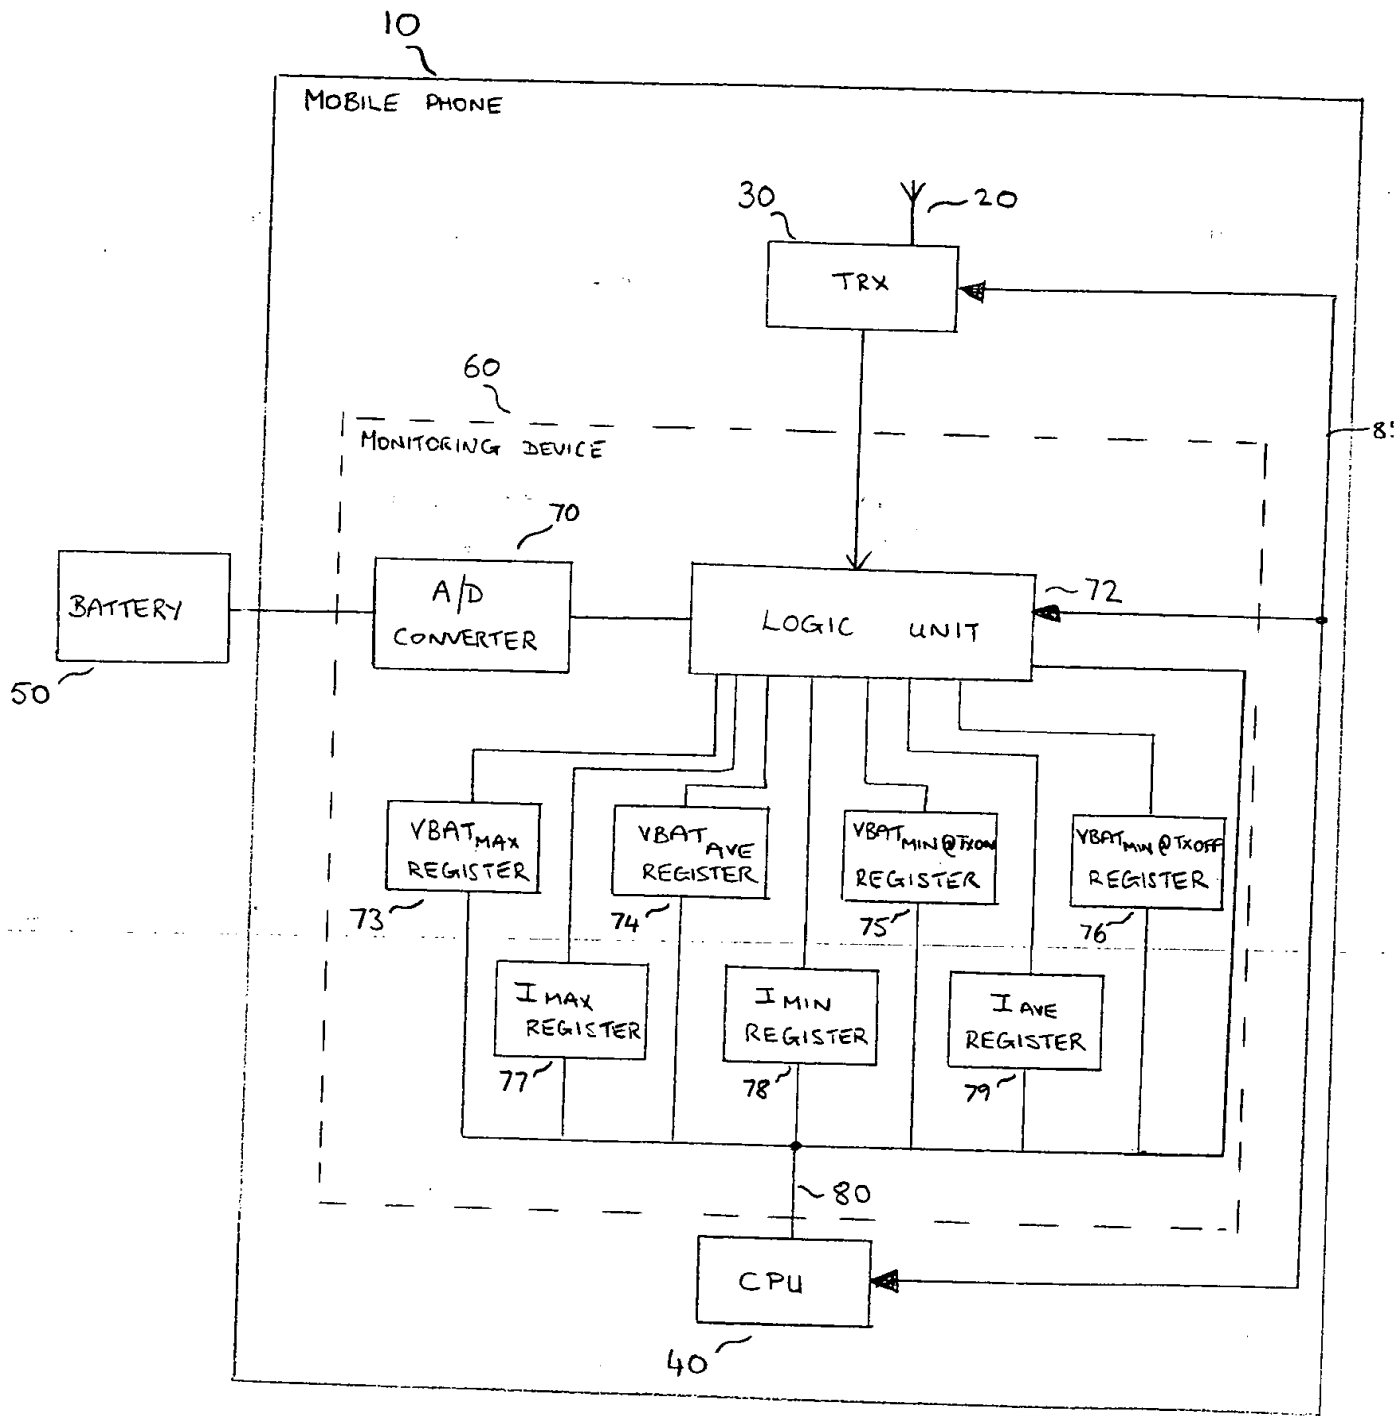


FIG. 1

THIS PAGE BLANK (USPTO)

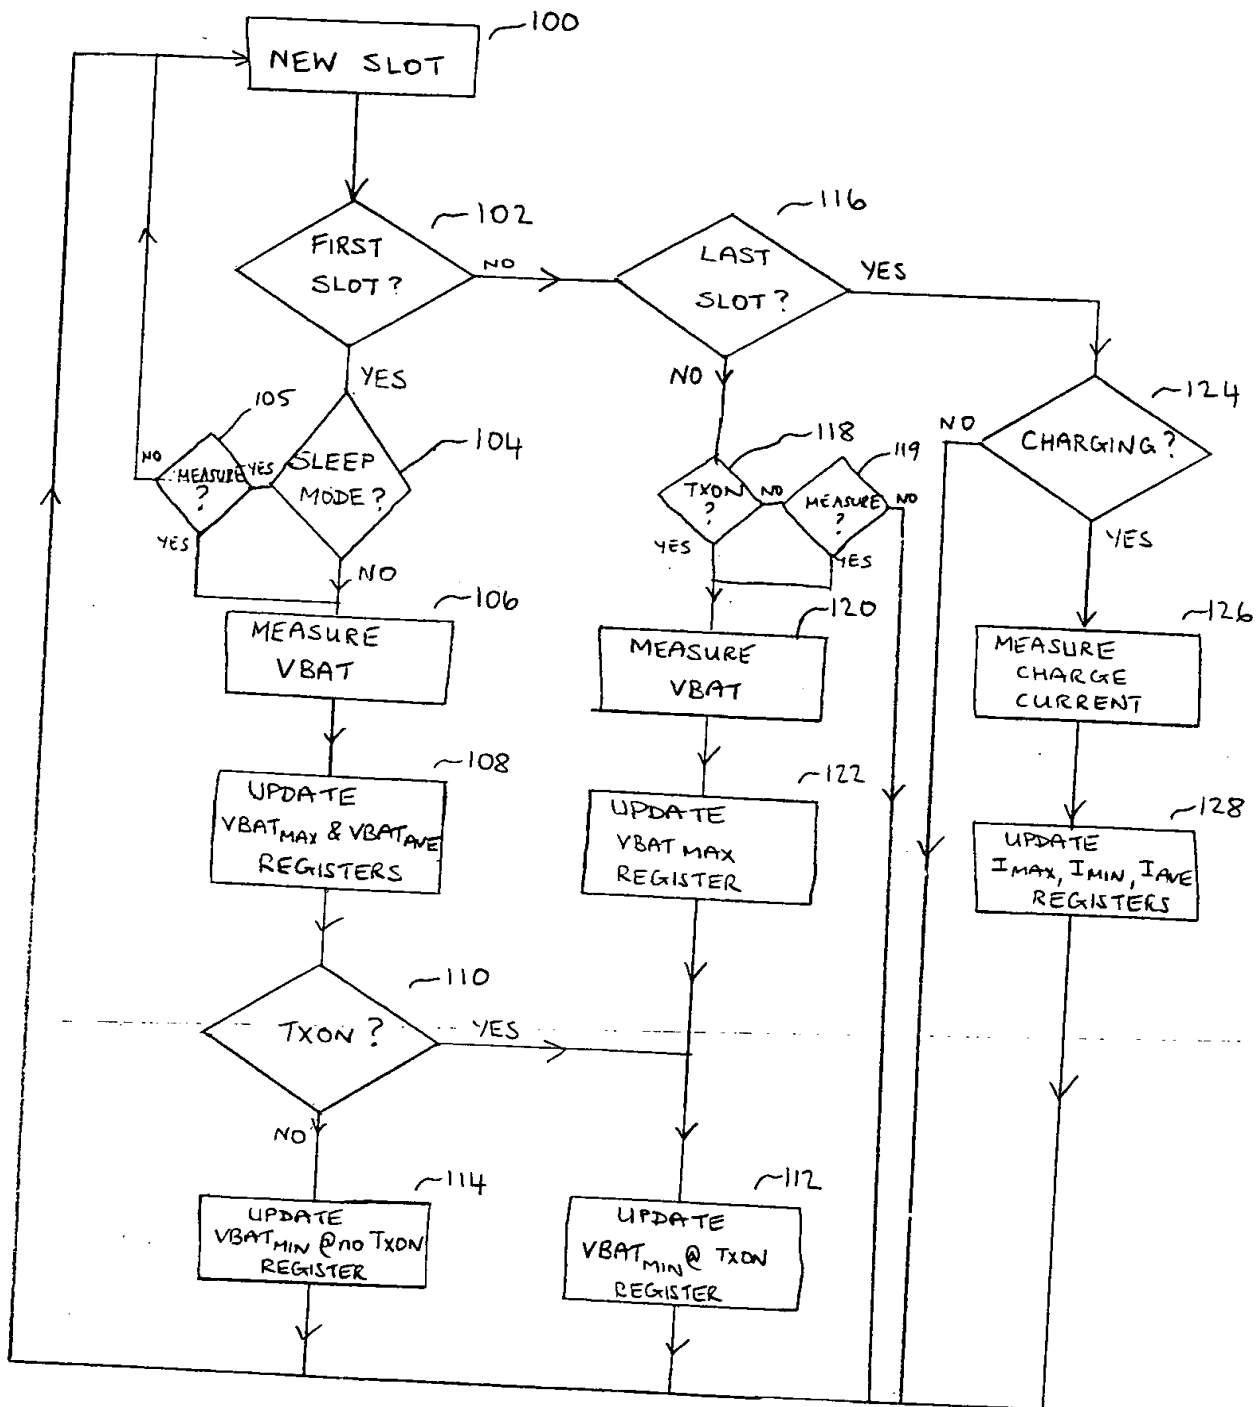


FIG. 2

THIS PAGE BLANK (USPTO)